

G: Gear type pump range

G: R Style:




Materials: CS | SS

Refrigeration pumps

The GR range has been developed specifically for industrial refrigeration applications. The pump has been designed to allow access to the pumping gears and seals without breaking down the fluid pipe work. Using a single pedestal to support both the motor and pump overcomes the need for motor alignment.

The pump offers good output for its size due to high speed running and is quiet in operation.

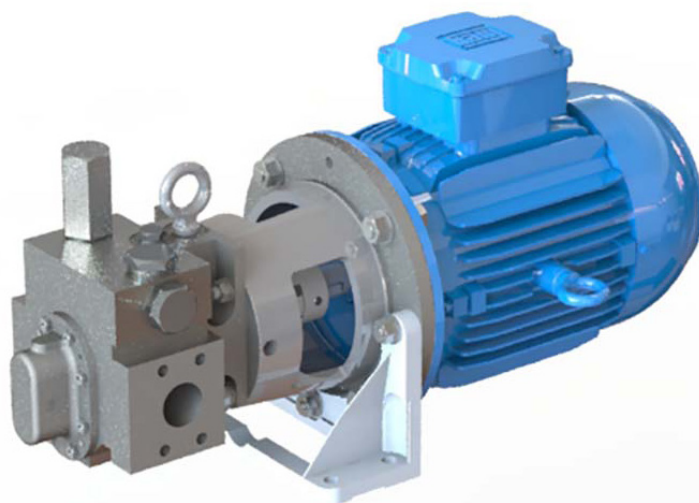

Albany's 24-page brochure is available as a download at www.albany-pumps.co.uk



Maximum working pressure 63 barg (system)	Pump size range 1" - 2"	Maximum temperature 180°C	Flow rate 50-450 L/min
--	--------------------------------	----------------------------------	-------------------------------

AL Aluminium | CS Cast Steel | CI Cast Iron | GM Gunmetal | HY Hastelloy | NR Ni-resist | NY Nylon | PP Polypropylene | SD Super Duplex | SS Stainless Steel
 General and Chemical Bitumen Fire Dispenser Machines Food Industry Lubrication Marine Oil & Gas Refrigeration Sugar

www.albany-pumps.co.uk +44 (0) 1594 842 275

Head Office and Manufacturing Centre

Albany Engineering Company Ltd
Church Road, Lydney
Gloucestershire, GL15 5EQ
United Kingdom

t: +44 (0) 1594 842 275
Head Office Option 1

e: sales@albany-pumps.co.uk